



At A Glance

Project:

Maintenance Dredging Works at Northport and Southpoint Wharves Frontage (Wharves 1 to 25) Including Marine Base.

Client:


Propetco Sdn Bhd

Contract Sum:

RM 5,928,000.00

Contract Period:

10.02.2021—30.06.2021

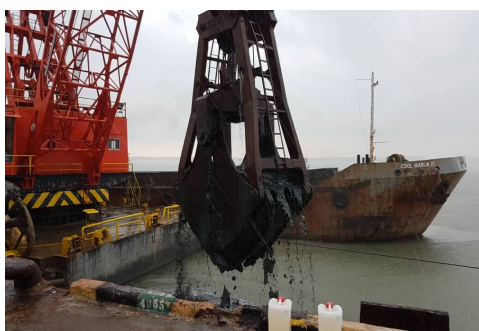

P116 : Dredging Works at Northport and Southpoint Wharves.

Dredging Works

Northport is one of the largest multi-purpose ports that offering dedicated facilities and services for conventional cargo handling including Southpoint.

The project is intended to carry out maintenance dredging by broadening its product base, including through 'logistical integration' and increasing its attractiveness to a wider range shippers and shipping lines.

Design Parameters:

Design Depth	: varies from –5 to 15.0mCD
Disposal Location	: 21 nautical miles
Dredge Quantity	: 256,000 m ³ (Provisional)

Vessel Deployed:

No.	Equipment	Capacity	Quantity
1	Grab Dredger	13m ³	1
2	Self-propelled Split Hopper Barge	1,000m ³	1
3	Non-propelled Split Hopper Barge	1,000m ³ & 1,280m ³	3
4	Tug Boat	1,000bhp & 1,200bhp	2
5	Anchor Handling Tug	5T	1

